




**AUOW008**

**SPECIFICATION**

HOUSING :CORROSION RESISTANT DIE CAST ALUMINIUM  
 :STAINLESS STEEL SCREWS  
 SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV  
 RESISTANT POLYESTER POWDER COAT  
 DIFFUSER :VANDAL RESISTANT TEMPERED GLASS  
 FRAME :DIE CAST ALUMINIUM  
 :SILICONE RUBBER

COLOR :BLACK, WHITE, SILVER  
 PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 55  
 INSTALLATION :WALL MOUNT  
 APPLICATION :BUILDING, HOTEL, RESTAURANT, RESIDENTIAL  
 PARKS, WALK WAYS, ETC.

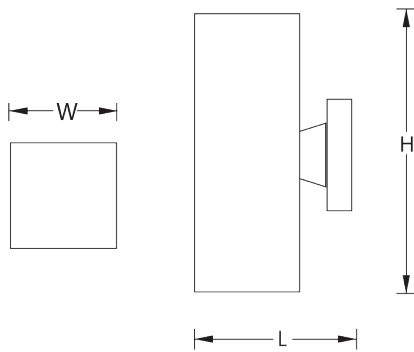

MODEL	DIMENSION(mm.)			LAMP HOLDER	LUMEN (MAX)	LAMP TYPE
	L	W	H			
AUOW008	155	90	310	GU 5.3 x 2	1200 cd.	2 x MR 16 12V. 50W.
				GU 5.3 x 2	1200 cd.	2 x MR 16 220V. 50W.
AUOW008/1	185	128	310	E 27 x 2	800 lm.	2 x PL 8, 11, 14W.
				E 27 x 2	1000 cd.	2 x PAR 20, 50W.
				E 27 x 2	6900 cd.	2 x PAR 30, 75, 100W.
AUOW008/2	225	150	410	E 27 x 2	9300 cd.	2 x PAR 38, 120W.