



AUOW500

SPECIFICATION

HOUSING :CORROSION RESISTANT DIE CAST ALUMINIUM
:WEATHERPROOF RUBBER GASKET

SURFACE TREATMENT :POLYESTER POWDER COAT


DIFFUSER :VANDAL RESISTANT TEMPERED FROSTED GLASS

COLOR :BLACK

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 55

INSTALLATION :WALL MOUNT

APPLICATION :BUILDING, HOTEL, RESTAURANT, RESIDENTIAL
PARKS, WALK WAYS, ETC.

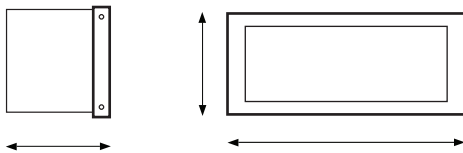

MODEL	DIMENSION(mm.)			LAMP	LUMEN	LAMP TYPE
	L	W	H	HOLDER	(MAX)	
AUOW500	230	85	100	E 27	800 lm.	PL 8, 11, 14W.
				G 24	1200 lm.	PLC 13, 18W.

WIRES

<input type="checkbox"/> THW	<input type="checkbox"/> 70 °C	<input type="checkbox"/> 0.5 SQmm.	<input type="checkbox"/> 13 AWG
<input type="checkbox"/> UL STYLE & CSA TYPE	<input type="checkbox"/> 90 °C	<input type="checkbox"/> 1.0 SQmm.	<input type="checkbox"/> 15 AWG
<input type="checkbox"/> HEATER WIRE	<input type="checkbox"/> 105 °C	<input type="checkbox"/> 1.5 SQmm.	<input type="checkbox"/> 17 AWG
<input type="checkbox"/> OTHER	<input type="checkbox"/> 200 °C	<input type="checkbox"/> 2.5 SQmm.	<input type="checkbox"/> 20 AWG