



Housing AL. Die-Casting with Electrostatic Powder Coating and Reflector AL. Anodized Specular Silver

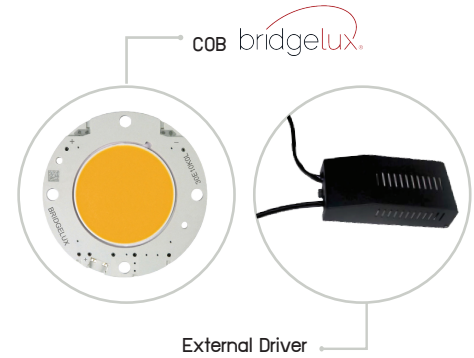


AU-DLLED-LZ-D3-2002-B38

Ø190 mm.

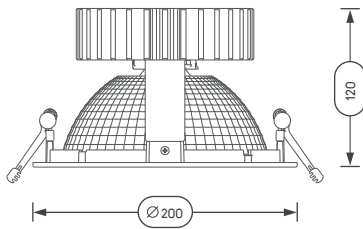

LIGHTING DISTRIBUTION CURVE



MODEL	AU-DLLED-LZ-D3-2002-B38
WATT	38W
Lamp COLOR	3000K
LUMEN OUTPUT	2700LM
Lamp COLOR	4000K
LUMEN OUTPUT	2900LM
CRI	>80
BEAM ANGLE	45°