





Housing AL. Die-Casting with Electrostatic Powder Coating and **Reflector** AL. Anodized Specular Silver

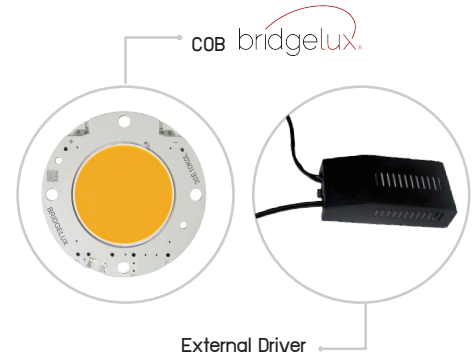


AU-DLLED-LZ-D3-4001-B30

Ø 115 mm.

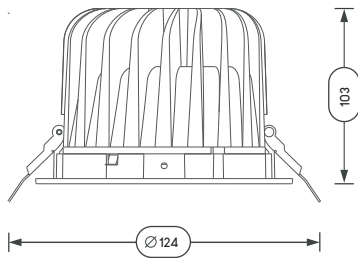

LIGHTING DISTRIBUTION CURVE



MODEL	AU-DLLED-LZ-D3-4001-B30
WATT	20W
Lamp COLOR	3000K
LUMEN OUTPUT	2000LM
Lamp COLOR	4000K
LUMEN OUTPUT	2080LM
CRI	>80
BEAM ANGLE	50°