



Housing AL. Die-Casting with Electrostatic Powder Coating and Reflector AL. Anodized Specular Silver

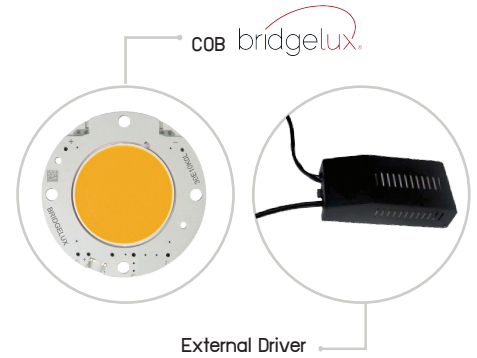


AU-DLLED-LZ-D3-7103-B60
AU-DLLED-LZ-D3-7103-B90

 \varnothing 85X85 mm.

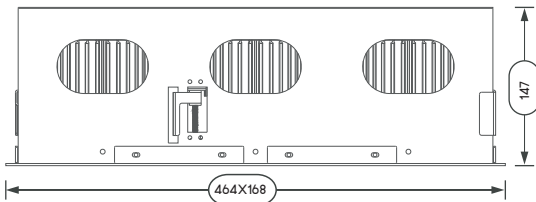

LIGHTING DISTRIBUTION CURVE



MODEL	AU-DLLED-LZ-D3-7103-B60	AU-DLLED-LZ-D3-7103-B90
WATT	3x20W	3x30W
Lamp COLOR	3000K	3000K
LUMEN OUTPUT	3x1620LM	3x2000LM
Lamp COLOR	4000K	4000K
LUMEN OUTPUT	3x1700LM	3x2080LM
CRI	>80	>80
BEAM ANGLE	45°	45°