



AUF FI2

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5036-3) FROM GERMANY

(OPTIONAL) :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5036-3) FROM GERMANY

COVER :WHITE STOVED ENAMELLED WIRE GUARD

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

LAMP HOLDER W/P :WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, IEC 60400/VDE 0615 PART3, UL


STARTER HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20 (AU-FIX-XXXG), IP 44 (AU-FIX-XXXGWP)

INSTALLATION :SURFACE MOUNT OR SUSPEND MOUNT

APPLICATION :FACTORY, WAREHOUSE, CARPARK, ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

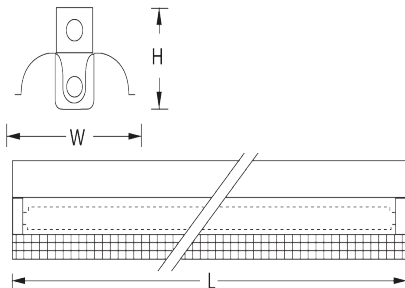

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF FI2-140G	1 x 36W. T8	1245	182	102	2.90
AUF FI2-140GWP	1 x 36W. T8	1245	182	102	2.80

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT