



AUF G1-220-240 WP

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :WHITE STOVED ENAMELLED WIRE GUARD

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER W/P :WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY,IEC 60400/VDE 0615 PART 3, UL


STARTER HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 44

INSTALLATION :SURFACE MOUNT OR SUSPEND MOUNT

APPLICATION :FACTORY, WAREHOUSE, CARPARK, ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

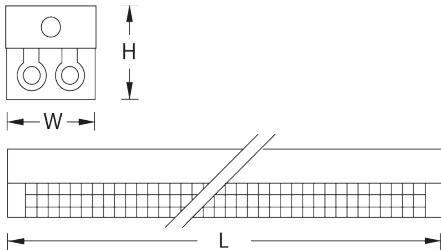

| MODEL | LAMP | DIMENSION(mm.) | | | WEIGHT (kg.) |
|---------------|-------------|----------------|-----|-----|--------------|
| | | L | W | H | |
| AUF G1-220 WP | 2 x 18W. T8 | 635 | 122 | 118 | 3.60 |
| AUF G1-240 WP | 2 x 36W. T8 | 1245 | 122 | 118 | 5.60 |

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT