

AUF I1

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :SPRING LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

STARTER HOLDER :ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :SURFACE MOUNT OR SUSPEND MOUNT

APPLICATION :FACTORY, SHOP, WAREHOUSE, CANTEEN, ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

COMPLETE SET** :INCLUDING ELECTRONIC BALLAST, LAMP FOR T5 LAMP

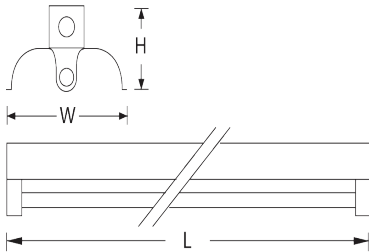

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF I1-120	1 x 18W. T8	635	182	85	1.95
AUF I1-140	1 x 36W. T8	1245	182	85	2.80
AUF I1-132	1 x 32W.T8	1245	182	85	2.80

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT