

**AUF I2-120-140WP**

**SPECIFICATION**

**HOUSING** :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

**SURFACE TREATMENT** :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

**REFLECTOR** :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5036-3) FROM GERMANY

**(OPTIONAL)** :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5036-3) FROM GERMANY

**WIRES** :THW, TIS.11-1988 STANDARD

**LAMP HOLDER W/P** :WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, ACCORING TO IEC 60400/VDE 0615 PART 3, UL


**STARTER HOLDER** :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE TIS344-1987 STANDARD

**PROTECTION CLASS** :PROTECTION CLASS EQUIVALENT TO IP 44

**INSTALLATION** :SURFACE MOUNT OR SUSPEND MOUNT

**APPLICATION** :FACTORY, WAREHOUSE, CANTEEN, CARPARK, ETC.

**COMPLETE SET\*** :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

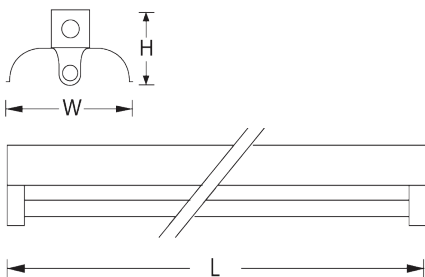

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF I2-120 WP	1 x 18W. T8	635	182	100	1.85
AUF I2-140 WP	1 x 36W. T8	1245	182	100	2.70
AUF I2-132 WP	1 x 32W. T8	1245	182	100	2.70

**INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT**