



AUF 12

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTOR 87% (DIN 5036-3) FROM GERMANY

(OPTIONAL) :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTOR 95% (DIN 5036-3) FROM GERMANY

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :SPRING LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


STARTER HOLDER :ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :SURFACE MOUNT OR SUSPEND MOUNT

APPLICATION :FACTORY, WAREHOUSE, SHOP, CANTEEN DEPARTMENT STORE, ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

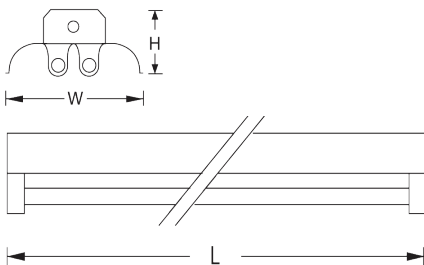

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF 12-220	2 x 18W. T8	635	240	105	2.65
AUF 12-232	2 x 32W. T8	1245	345	115	7.20
AUF 12-240	2 x 36W. T8	1245	240	105	3.80
AUF 12-320	3 x 18W. T8	635	345	115	4.70
AUF 12-340	3 x 36W. T8	1245	345	115	7.20

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT