



AUF I2-XXX WP

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5036-3) FROM GERMANY

(OPTIONAL) :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5036-3) FROM GERMANY

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, ACCORING TO IEC 60400/VDE 0615 PART 3, UL


STARTER HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE TIS344-1987 STANDARD

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 44

INSTALLATION :SURFACE MOUNT OR SUSPEND MOUNT

APPLICATION :FACTORY, WAREHOUSE, CANTEEN, CARPARK, ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

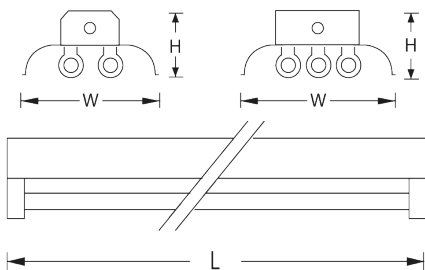

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF I2-220 WP	2 x 18W. T8	635	240	105	3.30
AUF I2-240 WP	2 x 36W. T8	1245	240	105	4.80
AUF I2-320 WP	3 x 18W. T8	635	345	115	4.95
AUF I2-340 WP	3 x 36W. T8	1245	345	115	7.75
AUF I2-232 WP	2 x 36W.T8	1245	340	115	7.20

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT