



AUF 13-220-240

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


STARTER HOLDER :ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :SURFACE MOUNT OR SUSPEND MOUNT

APPLICATION :FACTORY, SHOP, WAREHOUSE, CANTEEN, ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

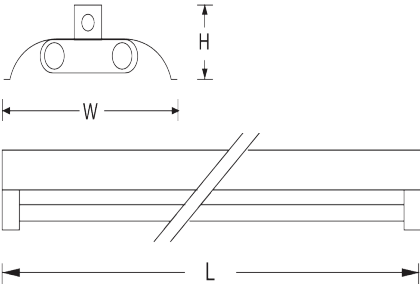

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF 13-220	2 x 18W. T8	610	200	85	2.60
AUF 13-240	2 x 36W. T8	1220	200	85	3.80

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT

- SHEET STEEL THICKNESS**
- 0.6 mm.
 - 0.7 mm.
 - 0.8 mm.
- LAMP HOLDER**
- ROTOR LOCKED TYPE
 - SPRING LOCKED TYPE
- REFLECTOR**
- TOTAL REFLECTION 87 %
 - TOTAL REFLECTION 95 %

WIRES

<input type="checkbox"/> THW	<input type="checkbox"/> 70°C	<input type="checkbox"/> 0.5 SQmm.	<input type="checkbox"/> 13 AWG
<input type="checkbox"/> UL STYLE & CSA TYPE	<input type="checkbox"/> 90°C	<input type="checkbox"/> 1.0 SQmm.	<input type="checkbox"/> 15 AWG
<input type="checkbox"/> HEATER WIRE	<input type="checkbox"/> 105°C	<input type="checkbox"/> 1.5 SQmm.	<input type="checkbox"/> 17 AWG
<input type="checkbox"/> OTHER	<input type="checkbox"/> 200°C	<input type="checkbox"/> 2.5 SQmm.	<input type="checkbox"/> 20 AWG