



AUF 14-220-240

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTOR 87% (DIN 5036-3) FROM GERMANY

(OPTIONAL) :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTOR 95% (DIN 5036-3) FROM GERMANY

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


STARTER HOLDER :ROTOR LOCKED DUSTPROOF TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :SURFACE MOUNT OR SUSPEND MOUNT

APPLICATION :FACTORY, WAREHOUSE, SHOP, CANTEEN DEPARTMENT STORE, ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

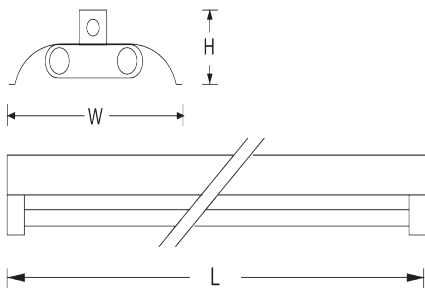

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF 14-220	2 x 18W. T8	610	200	85	2.30
AUF 14-240	2 x 36W. T8	1220	200	85	3.45

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT

SHEET STEEL THICKNESS

0.6 mm. 0.7 mm. 0.8 mm.

LAMP HOLDER

ROTOR LOCKED TYPE
 SPRING LOCKED TYPE

REFLECTOR

TOTAL REFLECTION 87 %
 TOTAL REFLECTION 95 %

WIRES

<input type="checkbox"/> THW	<input type="checkbox"/> 70°C	<input type="checkbox"/> 0.5 SQmm.	<input type="checkbox"/> 13 AWG
<input type="checkbox"/> UL STYLE & CSA TYPE	<input type="checkbox"/> 90°C	<input type="checkbox"/> 1.0 SQmm.	<input type="checkbox"/> 15 AWG
<input type="checkbox"/> HEATER WIRE	<input type="checkbox"/> 105°C	<input type="checkbox"/> 1.5 SQmm.	<input type="checkbox"/> 17 AWG
<input type="checkbox"/> OTHER	<input type="checkbox"/> 200°C	<input type="checkbox"/> 2.5 SQmm.	<input type="checkbox"/> 20 AWG