



AUFLAR

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5036-3) FROM GERMANY

(OPTIONAL) :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5036-3) FROM GERMANY

LOUVER :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH (DIN 5036-3) FROM GERMANY, (DIN 6730) FOR LONGITUDINAL & PROFILE ALUMINIUM CROSS BLADE

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :{AUFLAR-XXX} ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

STARTER HOLDER :{AUFLAS-XXX} SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

STARTER HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, ACCORDING TO TIS344-1987 STANDARD


PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :SURFACE OR SUSPEND MOUNT

APPLICATION :OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE UNIVERSITY, GOVERNMENTAL BUILDING, SHOP ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

COMPLETE SET** :INCLUDING ELECTRONIC BALLAST, LAMP FOR T5 LAMP

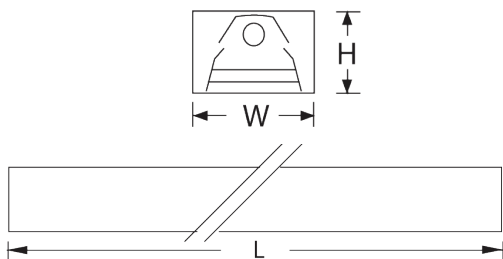

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUFLAR-120A	1 x 18W. T8	630	200	110	3.10
AUFLAR-140A	1 x 36W. T8	1225	200	110	4.90
AUFLAR-114A	1 x 14W. T5	575	200	70	2.80
AUFLAR-128A	1 x 28W. T5	1170	200	70	4.45
AUFLAR-154A	1 x 54W. T5	1170	200	70	4.50

INSTALLATION : SURFACE OR SUSPEND MOUNTED