

AUF LAR-140A-10+S

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM
99.85% MIRROR FINISH, TOTAL REFLECTION 87%
(DIN 5036-3) FROM GERMANY

(OPTIONAL) :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM
99.99% MIRROR FINISH, TOTAL REFLECTION 95%
(DIN 5036-3) FROM GERMANY

LOUVER :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM
99.85% MIRROR FINISH (DIN 5036-3) FROM GERMANY,
(DIN 6730) FOR LONGITUDINAL & PROFILE ALUMINIUM CROSS BLADE

WIRES :T1W, TIS.11-1988 STANDARD


LAMP HOLDER :{AU-F LAR-XXX} ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

STARTER HOLDER :{AU-F LAS-XXX} SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

PROTECTION CLASS :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

INSTALLATION :PROTECTION CLASS EQUIVALENT TO IP 20

APPLICATION :SURFACE OR SUSPEND MOUNT
:OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE
UNIVERSITY, GOVERNMENTAL BUILDING, SHOP ETC.

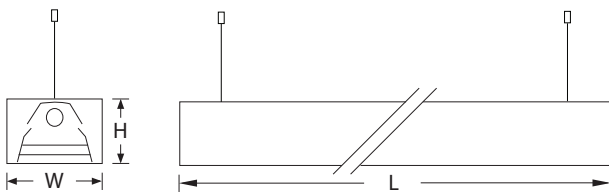

MODEL	LAMP	DIMENSION(mm.)		
		L	W	H
AUFLAR-140A-10+S	1 x 36W. T8	1225	100	100

INSTALLATION : SURFACE OR SUSPEND MOUNTED