



**AUFLAR-220B-214B**

**SPECIFICATION**

**HOUSING** :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

**SURFACE TREATMENT** :ION-PHOSPHATE ANDANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

**REFLECTOR** :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM  
99.85% MIRROR FINISH, TOTAL REFLECTION 87%  
(DIN 5036-3) FROM GERMANY

**(OPTIONAL)** :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM  
99.99% MIRROR FINISH, TOTAL REFLECTION 95%  
(DIN 5036-3) FROM GERMANY

**LOUVER** :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM  
99.85% MIRROR FINISH (DIN 5036-3) FROM GERMANY,  
(DIN 6730) FOR LONGITUDINAL & PROFILE ALUMINIUM CROSS BLADE

**WIRES** :THW, TIS.11-1988 STANDARD

**LAMP HOLDER** :{AUFLAR-XXX} ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD  
{AUFLAS-XXX} SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

**STARTER HOLDER** :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


**PROTECTION CLASS** :PROTECTION CLASS EQUIVALENT TO IP 20

**INSTALLATION** :SURFACE OR SUSPEND MOUNT

**APPLICATION** :OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE  
UNIVERSITY, GOVERNMENTAL BUILDING, SHOP ETC.

**COMPLETE SET\*** :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

**COMPLETE SET\*\*** :INCLUDING ELECTRONIC BALLAST, LAMP FOR T5 LAMP

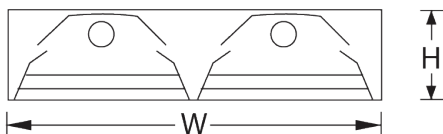

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUFLAR-220B	2 x 18W. T8	630	600	95	6.90
AUFLAR-214B	2 x 14W. T5	575	600	60	6.20

**INSTALLATION : SURFACE OR SUSPEND MOUNTED**