



**AUFLAR**

**SPECIFICATION**

**HOUSING** :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

**SURFACE TREATMENT** :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

**REFLECTOR** :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5036-3) FROM GERMANY

**(OPTIONAL)** :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5036-3) FROM GERMANY

**LOUVER** :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH (DIN 5036-3) FROM GERMANY, (DIN 6730) FOR LONGITUDINAL & PROFILE ALUMINIUM CROSS BLADE

**WIRES** :THW, TIS.11-1988 STANDARD

**LAMP HOLDER** :{AUFLAR-XXX} ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

**STARTER HOLDER** :{AUFLAS-XXX} SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

**STARTER HOLDER** :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


**PROTECTION CLASS** :PROTECTION CLASS EQUIVALENT TO IP 20

**INSTALLATION** :SURFACE OR SUSPEND MOUNT

**APPLICATION** :OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE UNIVERSITY, GOVERNMENTAL BUILDING, SHOP ETC.

**COMPLETE SET\*** :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

**COMPLETE SET\*\*** :INCLUDING ELECTRONIC BALLAST, LAMP FOR T5 LAMP

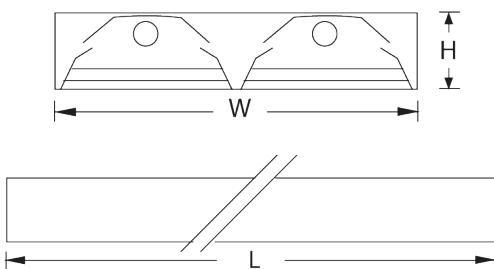

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUFLAR-240B	2 x 36W. T8	1225	600	95	10.25
AUFLAR-228B	2 x 28W. T5	1170	600	70	9.10
AUFLAR-254B	2 x 54W. T5	1170	600	70	9.15

**INSTALLATION : SURFACE OR SUSPEND MOUNTED**