



AUFLAR

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM
99.85% MIRROR FINISH, TOTAL REFLECTION 87%
(DIN 5036-3) FROM GERMANY

(OPTIONAL) :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM
99.99% MIRROR FINISH, TOTAL REFLECTION 95%
(DIN 5036-3) FROM GERMANY

LOUVER :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM
99.85% MIRROR FINISH (DIN 5036-3) FROM GERMANY,
(DIN 6730) FOR LONGITUDINAL & PROFILE ALUMINIUM CROSS BLADE

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :{AUFLAR-XXX} ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
:{AUFLAS-XXX} SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

STARTER HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, ACCORDING TO TIS344-1987 STANDARD


PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :SURFACE OR SUSPEND MOUNT

APPLICATION :OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE
UNIVERSITY, GOVERNMENTAL BUILDING, SHOP ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

COMPLETE SET** :INCLUDING ELECTRONIC BALLAST, LAMP FOR T5 LAMP

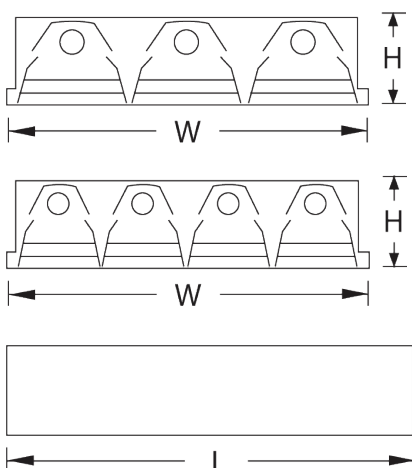

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUFLAR-320	3 x 18W. T8	630	600	95	7.60
AUFLAR-420	4 x 18W. T8	630	600	95	8.10
AUFLAR-314	3 x 14W. T5	575	600	70	6.90
AUFLAR-414	4 x 18W. T5	575	600	70	7.40

INSTALLATION : SURFACE OR SUSPEND MOUNTED