

AUF LPR

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5063-3) FORM GERMANY

(OPTIONAL) :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5063-3) FORM GERMANY

DIFFUSER :OPAL ACRYLIC (OP), CLEARACRYLIC (CL), STIPPLE ACRYLIC (ST), PRISMATIC ACRYLIC (PR)

FRAME :WHITE ENAMEL STEEL, EXTRUDE ALUMINIUM TRIM (OPTIONAL), SILICONE GASKET (OPTIONAL) WEATHER PROOF GASKET (OPTIONAL)

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

STARTER HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 55

INSTALLATION :SURFACE MOUNT OR SUSPEND MOUNT

APPLICATION :OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE HOTEL, UNIVERSITY, RESTAURANT, GOVERNMENTAL BUILDING, FACTORY, SHOP, WAREHOUSE, RESIDENTIAL, TOILET, CANTEEN, CLEAN ROOM, ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

COMPLETE SET** :INCLUDING ELECTRONIC BALLAST, LAMP FOR T5 LAMP

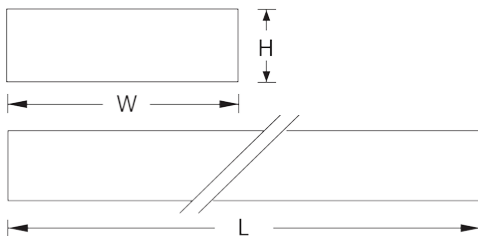

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF LPR-220B	2 x 18W. T8	630	600	95	6.40
AUF LPR-240B	2 x 36W. T8	1225	600	95	9.50
AUF LPR-320	3 x 18W. T8	630	600	95	6.70
AUF LPR-340	3 x 36W. T8	1225	600	95	9.80
AUF LPR-420	4 x 18W. T8	630	600	95	7.20
AUF LPR-440	4 x 36W. T8	1225	600	95	10.10

INSTALLATION : SURFACE OR SUSPEND MOUNT