



AUFMAR-220-214B

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM
99.85% MIRROR FINISH, TOTAL REFLECTION 87%
(DIN 5036-3) FROM GERMANY

(OPTIONAL) :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM
99.99% MIRROR FINISH, TOTAL REFLECTION 95%
(DIN 5036-3) FROM GERMANY

LOUVER :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM
99.85% MIRROR FINISH (DIN 5036-3) FROM GERMANY,
(DIN 6730) FOR LONGITUDINAL & PROFILE ALUMINIUM CROSS BLADE

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :{AUFMAR-XXX} ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
{AUFMAS-XXX} SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

STARTER HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :RECESS CONCEAL CEILING

APPLICATION :OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE
UNIVERSITY, GOVERNMENTAL BUILDING, SHOP ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

COMPLETE SET** :INCLUDING ELECTRONIC BALLAST, LAMP FOR T5 LAMP

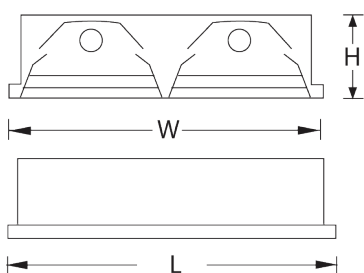

MODEL	LAMP	DIMENSION(mm.)			CUT OUT(mm.)		WEIGHT (kg.)
		L	W	H	L	W	
AUFMAS-220B	2 x 18W. T8	665	595	100	640	580	7.00
AUFMAR-114B	1 x 14W. T5	595	295	70	580	280	4.15
AUFMAR-214B	2 x 14W. T5	595	595	70	580	580	6.60

INSTALLATION : RECSS CONCEAL CEILING