AURA
Lighting Solutions

FLUORESCENT

MIRROR LOUVER TYPE

AUFMAS-MAR

SPECIFICATION

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
REFLECTOR	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH TOTAL REFLECTION 87% (DIN 5036-3) FROM GERMANY
(OPTIONAL)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH TOTAL REFLECTION 95% (DIN 5036-3) FROM GERMANY
LOUVER	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH (DIN 5036-3) FROM GERMANY, (DIN 6730) FOR LONGITUDINAL & PROFILE ALUMINIUM CROSS BLADE
WIRES	:THW, TIS.11-1988 STANDARD
LAMP HOLDER	:(AUFMAR-XXX) ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD :(AUFMAS-XXX) SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
STARTER HOLDER	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
PROTECTION CLASS	:PROTECTION CLASS EQUIVALENT TO IP 20
INSTALLATION	:RECESS CONCEAL CEILING
APPLICATION	:OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE UNIVERSITY, GOVERNMENTAL BUILDING, SHOP ETC.
COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP
COMPLETE SET**	:INCLUDING ELECTRONIC BALLAST, LAMP FOR T5 LAMP

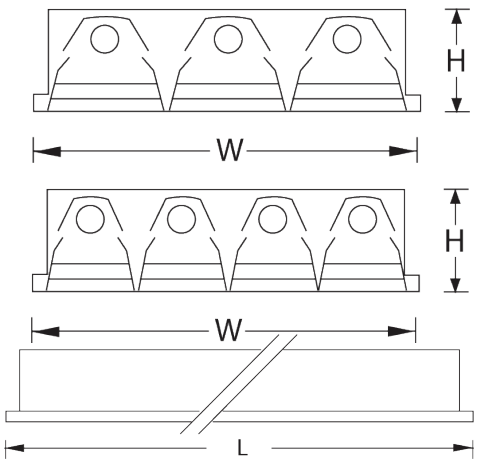

MODEL	LAMP	DIMENSION(mm.)					WEIGHT
		L	W	H	L	W	(kg.)
AUFMAS-340	3 x 36W. T8	1275	595	100	1250	580	11.50
AUFMAS-440	4 x 36W. T8	1275	595	100	1250	580	11.95

INSTALLATION : RECSS CONCEAL CEILING

SHEET STEEL THICKNESS

☐ 0.6 mm. ☐ 0.7 mm. ☐ 0.8 mm.ผอฟ

LAMP HOLDER

☐ ROTOR LOCKED TYPEกดิ์ก็ รัญฏ

☐ SPRING LOCKED TYPE

REFLECTOR

☐ TOTAL REFLECTION 87 %

☐ TOTAL REFLECTION 95 %

WIRES

☐ THW	☐ 70 °C	☐ 0.5 SQmm.	☐ 13 AWG
☐ UL STYLE & CSA TYPE	☐ 90 °C	☐ 1.0 SQmm.	☐ 15 AWG
☐ HEATER WIRE	☐ 105 °C	☐ 1.5 SQmm.	☐ 17 AWG
☐ OTHER	☐ 200 °C	☐ 2.5 SQmm.	☐ 20 AWG