



AUF MBS

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5063-3) FORM GERMANY

(OPTIONAL) :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5063-3) FORM GERMANY

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


STARTER HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :RECESS T-BAR CEILING, RECESS CONCEAL CEILING

APPLICATION :OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE UNIVERSITY, GOVERNMENTAL BUILDING, FACTORY SHOP, WAREHOUSE, CANTEEN, ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

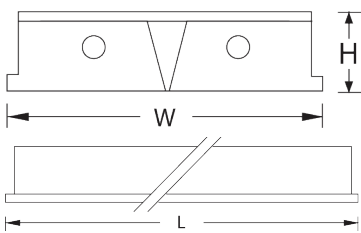

MODEL	LAMP	DIMENSION(mm.)			CUT OUT(mm.)		WEIGHT (kg.)
		L	W	H	L	W	
AUFMBS-120A	1 x 18W. T8	665	200	100	640	180	3.70
AUFMBS-120B	1 x 18W. T8	665	295	100	640	280	4.50
AUFMBS-220A	2 x 18W. T8	665	295	100	640	280	4.60
AUFMBS-220B	2 x 18W. T8	665	595	100	640	580	7.60
AUFMBS-140A	1 x 36W. T8	1275	200	100	1250	180	6.60
AUFMBS-140B	1 x 36W. T8	1275	295	100	1250	280	7.20
AUFMBS-132B	1 x 32W. T8	1275	295	100	1250	280	7.20
AUFMBS-240A	2 x 36W. T8	1275	295	100	1250	280	7.30
AUFMBS-232A	2 x 32W. T8	1275	295	100	1250	280	7.30
AUFMBS-240B	2 x 36W. T8	1275	595	100	1250	580	11.50
AUFMBS-232B	2 x 32W. T8	1275	595	100	1250	580	11.50

INSTALLATION : RECESS T-BAR CEILING