

AUFTM2-120-220A

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM
99.85% MIRROR FINISH, TOTAL REFLECTION 87%

(OPTIONAL) :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM
99.99% MIRROR FINISH, TOTAL REFLECTION 95%

LOUVER :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM
99.85% MIRROR FINISH FOR LONGITUDINAL & PROFILE ALUMINIUM CROSS BLADE

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


STARTER HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :RECESS T-BAR CEILING, RECESS CONCEAL CEILING (M-BAR)

APPLICATION :OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE UNIVERSITY, GOVERNMENTAL BUILDING, SHOP ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

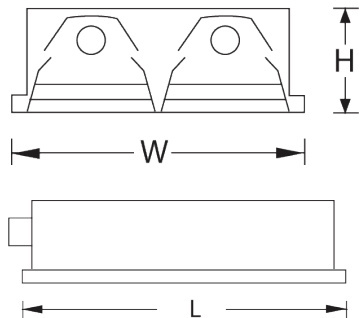

MODEL	LAMP	DIMENSION(mm.)			CUT OUT(mm.)		WEIGHT (kg.)
		L	W	H	L	W	
AUFTM2-120A	1 x 18W. T8	595	195	80	580	180	3.50
AUFTM2-220A	2 x 18W. T8	595	295	80	580	280	3.90

INSTALLATION : RECESS T-BAR CEILING, RECESS CONCEAL CEILING (M-BAR)