


**AUF U1-120-140**

**SPECIFICATION**

HOUSING	:HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES	STARTER HOLDER	:WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, IEC 60400/VDE 0615 PART3. UL
SURFACE TREATMENT	:ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT	PROTECTION CLASS	:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
REFLECTOR	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5063-3) FORM GERMANY	INSTALLATION	:SURFACE MOUNT OR SUSPEND MOUNT
(OPTIONAL)	:PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5063-3) FORM GERMANY	APPLICATION	:OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE UNIVERSITY, GOVERNMENTAL BUILDING, FACTORY SHOP, WAREHOUSE, RESIDENTIAL, TOILET, CANTEEN CLEAN ROOM, ETC.
DIFFUSER	:OPAL ACRYLIC (OP), CLEARACRYLIC (CL), STIPPLE ACRYLIC (ST), PRISMATIC ACRYLIC (PR)	COMPLETE SET*	:INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP
WIRES	:THW, TIS.11-1988 STANDARD		
LAMP HOLDER	:SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD		

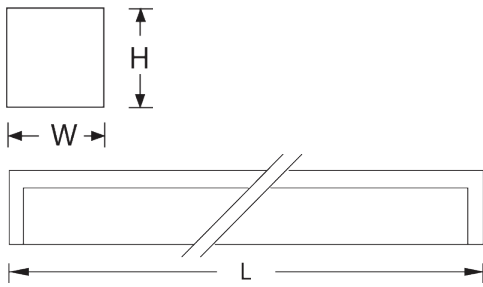

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF U1-120	1 x 18W. T8	635	75	85	1.90
AUF U1-140	1 x 36W. T8	1245	75	85	2.90
AUF U1-132	1 x 32W. T8	1245	75	85	1.90

INSTALLATION : SURFACE OR SUSPEND MOUNT