



CLEAR



STIPPLE



OPAL



PRISMATIC



AUF U1-220-240

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5063-3) FORM GERMANY

(OPTIONAL) :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5063-3) FORM GERMANY

DIFFUSER :OPAL ACRYLIC (OP), CLEARACRYLIC (CL), STIPPLE ACRYLIC (ST), PRISMATIC ACRYLIC (PR)

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


STARTER HOLDER :WATER AND DUSTPROOF LAMP HOLDER FROM GERMANY, IEC 60400/VDE 0615 PART3. UL
:ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 44

INSTALLATION :SURFACE MOUNT OR SUSPEND MOUNT

APPLICATION :OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE UNIVERSITY, GOVERNMENTAL BUILDING, FACTORY SHOP, WAREHOUSE, RESIDENTIAL, TOILET, CANTEEN CLEAN ROOM, ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

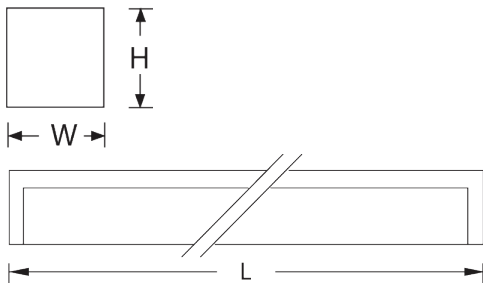

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF U1-220	2 x 18W. T8	635	200	70	4.20
AUF U1-228	2 x 28W. T8	1245	200	70	5.80
AUF U1-240	2 x 36W. T8	1245	200	70	6.70
AUF U1-232	2 x 32W. T8	1245	200	70	6.70

INSTALLATION : SURFACE OR SUSPEND MOUNT