


AUF U2

SPECIFICATION

HOUSING : (HI-FU2-XXXA) HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES
 : (HI-FU2-XXXB) EXTRUDED ALUMINIUM
 SURFACE TREATMENT : ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
 REFLECTOR(OPTIONAL) : PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR (DIN 5036-3) FROM GERMANY
 DIFFUSER : EXTRUDED ACRYLIC RIBBED PATTERN ON INSIDE FOR EVEN DIFFUSION
 WIRES : THW, TIS.11-1988 STANDARD

LAMP HOLDER : ROTOR LOCKED TYPE HIGH-HEATRESISTANCE, TIS344-1987 STANDARD
 STARTER HOLDER : ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
 PROTECTION CLASS : PROTECTION CLASS EQUIVALENT TO IP 44
 INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT
 APPLICATION : OFFICE BUILDING, HOSPITAL, DEPARMENT STORE HOTEL, UNIVERSITY, FACTORY, SHOP, WAREHOUSE RESIDENTIAL, TOILET, CANTEEN, CLEAN ROOM ETC.
 COMPLETE SET* : INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 & T5 LAMP

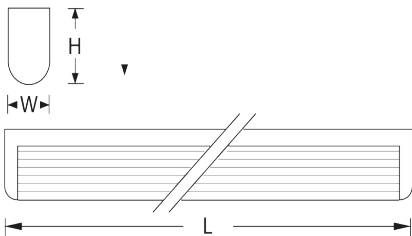

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF U2-120A	1 x 18W. T8	650	43	75	1.50
AUF U2-140A	1 x 36W. T8	1260	43	75	2.20
AUF U2-120B	1 x 18W. T8	650	43	75	1.60
AUF U2-140B	1 x 36W. T8	1260	43	75	2.35

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT