



OPAL



PRISMATIC

**AUF U3**

**SPECIFICATION**

**HOUSING** :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

**SURFACE TREATMENT** :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

**REFLECTOR(OPTIONAL)** :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR (DIN 5036-3) FROM GERMANY

**DIFFUSER** :OPAL ACRYLIC (OP), PRISMATIC ACRYLIC (PR)

**WIRES** :THW, TIS.11-1988 STANDARD

**LAMP HOLDER** :ROTOR LOCKED TYPE HIGH-HEATRESISTANCE, TIS344-1987 STANDARD


**STARTER HOLDER** :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

**PROTECTION CLASS** :PROTECTION CLASS EQUIVALENT TO IP 44

**INSTALLATION** :SURFACE MOUNT OR SUSPEND MOUNT

**APPLICATION** :OFFICE BUILDING, HOSPITAL, RESTAURANT,SHOP RESIDENTIAL, TOILET, CANTEEN, ETC.

**COMPLETE SET\*** :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

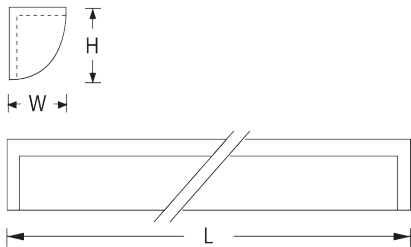

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF U3-120	1 x 18W. T8	620	110	110	2.30
AUF U3-140	1 x 36W. T8	1230	110	110	3.70
AUF U3-132	1 x 32W. T8	1230	110	110	3.70

**INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT**