

AUF U5

SPECIFICATION

HOUSING :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

SURFACE TREATMENT :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

REFLECTOR :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR

DIFFUSER :PRISMATIC ACRYLIC

WIRES :THW, TIS.11-1988 STANDARD

LAMP HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


STARTER HOLDER :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

PROTECTION CLASS :PROTECTION CLASS EQUIVALENT TO IP 20

INSTALLATION :SURFACE MOUNT OR SUSPEND MOUNT

APPLICATION :OFFICE BUILDING, HOSPITAL, DEPARMENT STORE HOTEL, UNIVERSITY, RESTAURANT, SHOP, RESIDENTIAL, ETC.

COMPLETE SET* :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

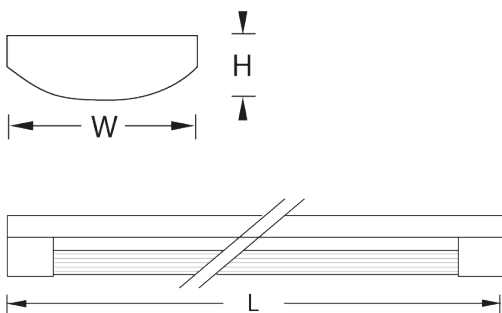

MODEL	LAMP	DIMENSION(mm.)			WEIGHT (kg.)
		L	W	H	
AUF U5-120	1 x 18W. T8	730	163	54	1.90
AUF U5-220	2 x 18W. T8	730	163	54	2.55
AUF U5-140	1 x 36W. T8	1345	163	54	3.85
AUF U5-240	2 x 36W. T8	1345	163	54	4.55

INSTALLATION : SURFACE MOUNT OR SUSPEND MOUNT