

**AUFLPR**

**SPECIFICATION**

**HOUSING** :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

**SURFACE TREATMENT** :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

**DIFFUSER** :OPAL ACRYLIC (OP), CLEARACRYLIC (CL), PRISMATIC ACRYLIC (PR)

**WIRES** :THW, TIS.11-1988 STANDARD

**LAMP HOLDER** :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

**STARTER HOLDER** :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


**PROTECTION CLASS** :PROTECTION CLASS EQUIVALENT TO IP 55

**INSTALLATION** :SURFACE MOUNT OR SUSPEND MOUNT

**APPLICATION** :OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE HOTEL, UNIVERSITY, RESTAURANT, GOVERNMENTAL BUILDING, FACTORY, SHOP, WAREHOUSE, RESIDENTIAL, TOILET, CANTEEN, CLEAN ROOM, ETC.

**COMPLETE SET\*** :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP OR LED LINEAR

**COMPLETE SET\*\*** :INCLUDING ELECTRONIC BALLAST, LAMP FOR T5 LAMP OR LED LINEAR

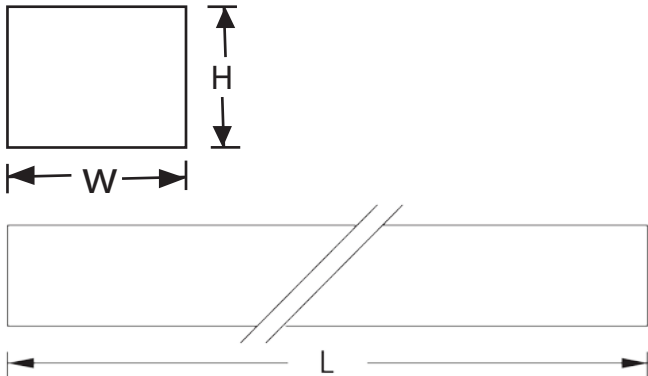

MODEL	LAMP	DIMENSION(mm.)		
		L	W	H
AUFLPR-120A-8-S	1 x 18W T8	630	80	80
AUFLPR-120A-10-S	1 x 18W T8	630	100	80
AUFLPR-220A-10-S	2 x 18W T8	630	100	80
AUFLPR-140A-8-S	1 x 36W T8	1225	80	80
AUFLPR-140A-10-S	1 x 36W T8	1225	100	80
AUFLPR-240A-10-S	2 x 36W T8	1225	100	80