



**AUFTM2P**

**SPECIFICATION**

**HOUSING** :HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES

**SURFACE TREATMENT** :ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT

**REFLECTOR** :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR FINISH, TOTAL REFLECTION 87% (DIN 5063-3) FORM GERMANY

**(OPTIONAL)** :PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.99% MIRROR FINISH, TOTAL REFLECTION 95% (DIN 5063-3) FORM GERMANY

**DIFFUSER** :OPAL ACRYLIC (OP), CLEARACRYLIC (CL), STIPPLE ACRYLIC (ST), PRISMATIC ACRYLIC (PR)

**FRAME** :WHITE ENAMEL STEEL FRAME, EXTRUDE ALUMINIUM TRIM (OPTIONAL), SILICONE GASKET (OPTIONAL) WEATHER PROOF GASKET (OPTIONAL)

**WIRES** :THW, TIS.11-1988 STANDARD

**LAMP HOLDER** :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD


**STARTER HOLDER** :ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD

**PROTECTION CLASS** :PROTECTION CLASS EQUIVALENT TO IP 54

**INSTALLATION** :RECESS T-BAR CEILING, RECESS CONCEAL CEILING

**APPLICATION** :OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE UNIVERSITY, RESTAURANT, GOVERNMENTAL BUILDING, FACTORY, SHOP, WAREHOUSE, RESIDENTIAL, TOILET, CANTEEN, CLEAN ROOM, ETC.

**COMPLETE SET\*** :INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

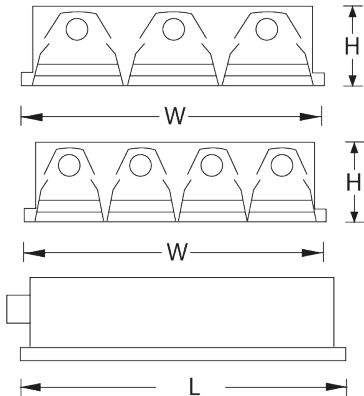

MODEL	LAMP	DIMENSION(mm.)			CUT OUT(mm.)		WEIGHT (kg.)
		L	W	H	L	W	
AUF TM2P-320	3 x 18W. T8	595	595	80	580	580	7.00
AUF TM2P-420	4 x 18W. T8	595	595	80	580	580	7.40
AUF TM2P-340	3 x 36W. T8	1195	595	80	1180	580	11.10
AUF TM2P-440	4 x 36W. T8	1195	595	80	1180	580	11.50

**INSTALLATION** : RECESS T-BAR CEILING, RECESS CONCEAL CEILING (M-BAR)