




Product Features

- ▶ Adopting international first-class brand lamp beads with high luminous efficiency, high finger display, and low light attenuation, with a long service life.
- ▶ Multiple lens angles, suitable for different locations, 30°/60°/90°/120°.
- ▶ One body die casting, thickened heat dissipation ribs, quickly and evenly dissipate the heat generated by the light source, extending its service life.
- ▶ Glass front buckle design, IP66 waterproof and dustproof.


Application scope

Widely used in shopping malls, exhibition halls, parking lots, sports fields, gyms, billboards, parks, sculptures, green lighting projects, building facades, as well as indoor and outdoor lighting for public corridors, staircases, and corridors.

Light Distribution Curves

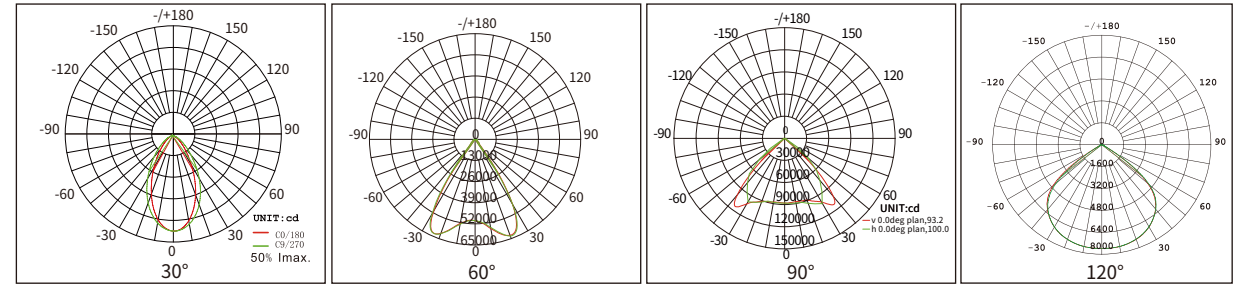

Size

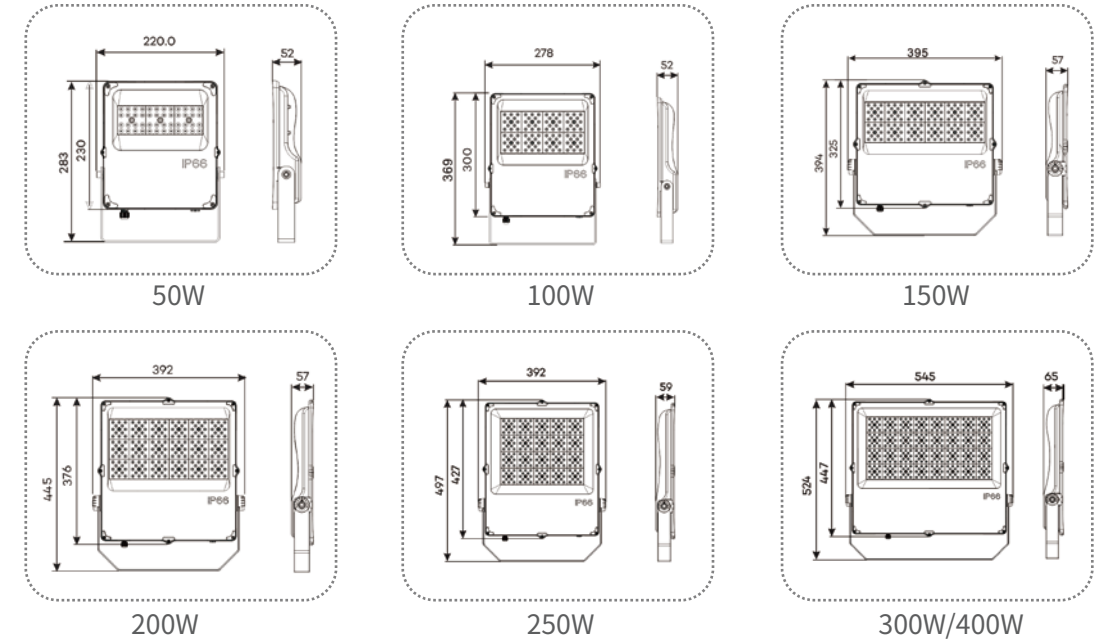

Specifications



Model	30W-H	50W-H	100W-H	150W-H	200W-H	250W-H	300W-H	400W-H
Power	30W	50W	100W	150W	200W	250W	300W	400W
Lumen	3600lm	6000lm	12000lm	18000lm	24000lm	30000lm	36000lm	48000lm
Efficacy	120lm/W							
CCT	2700-6500K							
CRI	≥80Ra							
LED	San'an, Lumileds/Osram 3030							
PF	>0.95							
Input voltage	AC100-277V							
THD	15%<THD<20%							
N. G.	1.3	1.7	2.8	4.8	5.4	6.2	9.8	10.2
Size(mm)	242*169*51	283*220*52	369*278*52	394*395*57	445*392*57	497*392*59	524*545*65	524*545*65
Beam Angle	30°/ 60°/ 90°/ 120°							
Work Temp	-40~+60°C							
LED Junction Temp	≤80°C							
Humidity	25%~90% RH,							
Life span	≥50000H							
IP Grade	IP66							
IK Grade	IK08							
Body material								
Power Wire	Product Material			Electronic security level				
Cable(3*1mm ²) L=0.5m	PC+ Aluminum+PC+Glass			Class I				